

VARILIGHT® Matrix Plate Kit



Doyle & Tratt Products Ltd, Carylls Lea, Faygate, Horsham, W. Sussex, RH12 4SJ, UK. +44 (01293) 223333 Varilight Europe Kft, 2600 Vác, Althann Mihály Frigyes utca 2, Hungary.

Please read these instructions carefully before beginning any electrical work and retain them for future reference. The product should be installed in accordance with the current addition of the IEE Wiring regulations. If in doubt, consult a qualified electrician.


1. Always switch OFF the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before beginning electrical work.
2. Insert the dimmer module(s) into the faceplate, and use the clear plastic round nut and nut spinner to fix the module to the faceplate.
3. Push the dimmer knobs onto the spindles.
4. Always use cable of the correct rating and type.
5. The layout of the terminals may differ between fittings so check the location of terminal connections carefully before wiring.
6. Make electrical connections according to the relevant diagram ensuring no bare wires protrude from the terminals.
7. If the product has an earth terminal connect the fixed earth wire to it and then connect a short length of wire from the earth terminal on the product to the earth terminal on the wall box. The earth wire should be sheathed with green and yellow sleeving.
8. Screw plate to wall using fixing screws supplied.
9. Switch on the mains supply.

WARNING: Do not apply products with metal faceplates directly to freshly plastered or damp surfaces as product may tarnish. If in doubt, use polythene as a temporary gasket to protect the product. Do not use masking tape on metal faceplates.

Guarantee: If the unit becomes faulty within 10 years of purchase, you may return it for replacement to either address listed in the overview section above, together with a letter stating the guarantee registration number below, the date and place of purchase, your contact details and return address, the type and wattage of the lighting or other load being controlled and the details of the fault. This guarantee states Varilight's entire liability, which does not extend to cover consequential loss or damage or installation costs arising from a defective product. This guarantee does not in any way affect the statutory rights of the purchaser and is offered so that you may have the benefit of our technical facilities. In many cases products don't need replacing, so for further information and help with troubleshooting, see our FAQ page at www.varilight.co.uk/faqs, or contact our Customer Services by calling +44 (01293) 223333 or create a support ticket at www.varilight.co.uk/help.

DOYLE & TRATT PRODUCTS LTD. Guarantee No. MATRIX004

Product Description	Max Total Plate Wattage LED	Max Total Plate Wattage Halogen
1-Gang Dimmer Kit (Single Plate)	400	1000
1-Gang Dimmer Kit (Twin Plate)	600	1200
2-Gang Dimmer Kit (Single Plate)	400	1000
2-Gang Dimmer Kit (Twin Plate)	600	1200
3-Gang Dimmer Kit (Twin Plate)	600	1200
4-Gang Dimmer Kit (Twin Plate)	600	1200

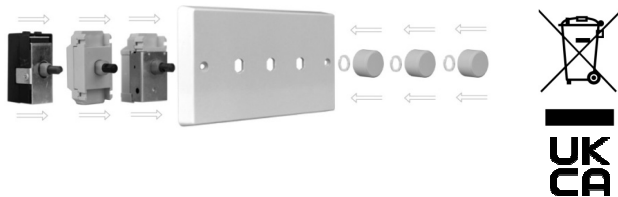

VARILIGHT® Matrix Plate Kit



Doyle & Tratt Products Ltd, Carylls Lea, Faygate, Horsham, W. Sussex, RH12 4SJ, UK. +44 (01293) 223333 Varilight Europe Kft, 2600 Vác, Althann Mihály Frigyes utca 2, Hungary.

Please read these instructions carefully before beginning any electrical work and retain them for future reference. The product should be installed in accordance with the current addition of the IEE Wiring regulations. If in doubt, consult a qualified electrician.


1. Always switch OFF the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before beginning electrical work.
2. Insert the dimmer module(s) into the faceplate, and use the clear plastic round nut and nut spinner to fix the module to the faceplate.
3. Push the dimmer knobs onto the spindles.
4. Always use cable of the correct rating and type.
5. The layout of the terminals may differ between fittings so check the location of terminal connections carefully before wiring.
6. Make electrical connections according to the relevant diagram ensuring no bare wires protrude from the terminals.
7. If the product has an earth terminal connect the fixed earth wire to it and then connect a short length of wire from the earth terminal on the product to the earth terminal on the wall box. The earth wire should be sheathed with green and yellow sleeving.
8. Screw plate to wall using fixing screws supplied.
9. Switch on the mains supply.

WARNING: Do not apply products with metal faceplates directly to freshly plastered or damp surfaces as product may tarnish. If in doubt, use polythene as a temporary gasket to protect the product. Do not use masking tape on metal faceplates.

Guarantee: If the unit becomes faulty within 10 years of purchase, you may return it for replacement to either address listed in the overview section above, together with a letter stating the guarantee registration number below, the date and place of purchase, your contact details and return address, the type and wattage of the lighting or other load being controlled and the details of the fault. This guarantee states Varilight's entire liability, which does not extend to cover consequential loss or damage or installation costs arising from a defective product. This guarantee does not in any way affect the statutory rights of the purchaser and is offered so that you may have the benefit of our technical facilities. In many cases products don't need replacing, so for further information and help with troubleshooting, see our FAQ page at www.varilight.co.uk/faqs, or contact our Customer Services by calling +44 (01293) 223333 or create a support ticket at www.varilight.co.uk/help.

DOYLE & TRATT PRODUCTS LTD. Guarantee No. MATRIX004

Product Description	Max Total Plate Wattage LED	Max Total Plate Wattage Halogen
1-Gang Dimmer Kit (Single Plate)	400	1000
1-Gang Dimmer Kit (Twin Plate)	600	1200
2-Gang Dimmer Kit (Single Plate)	400	1000
2-Gang Dimmer Kit (Twin Plate)	600	1200
3-Gang Dimmer Kit (Twin Plate)	600	1200
4-Gang Dimmer Kit (Twin Plate)	600	1200

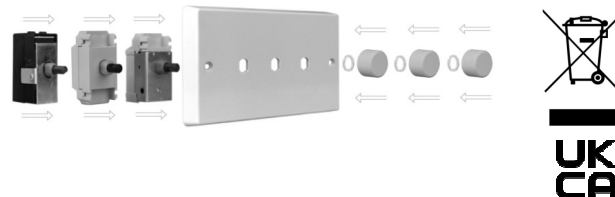

VARILIGHT® Matrix Plate Kit



Doyle & Tratt Products Ltd, Carylls Lea, Faygate, Horsham, W. Sussex, RH12 4SJ, UK. +44 (01293) 223333 Varilight Europe Kft, 2600 Vác, Althann Mihály Frigyes utca 2, Hungary.

Please read these instructions carefully before beginning any electrical work and retain them for future reference. The product should be installed in accordance with the current addition of the IEE Wiring regulations. If in doubt, consult a qualified electrician.

1. Always switch OFF the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before beginning electrical work.
2. Insert the dimmer module(s) into the faceplate, and use the clear plastic round nut and nut spinner to fix the module to the faceplate.
3. Push the dimmer knobs onto the spindles.
4. Always use cable of the correct rating and type.
5. The layout of the terminals may differ between fittings so check the location of terminal connections carefully before wiring.
6. Make electrical connections according to the relevant diagram ensuring no bare wires protrude from the terminals.
7. If the product has an earth terminal connect the fixed earth wire to it and then connect a short length of wire from the earth terminal on the product to the earth terminal on the wall box. The earth wire should be sheathed with green and yellow sleeving.
8. Screw plate to wall using fixing screws supplied.
9. Switch on the mains supply.

WARNING: Do not apply products with metal faceplates directly to freshly plastered or damp surfaces as product may tarnish. If in doubt, use polythene as a temporary gasket to protect the product. Do not use masking tape on metal faceplates.

Guarantee: If the unit becomes faulty within 10 years of purchase, you may return it for replacement to either address listed in the overview section above, together with a letter stating the guarantee registration number below, the date and place of purchase, your contact details and return address, the type and wattage of the lighting or other load being controlled and the details of the fault. This guarantee states Varilight's entire liability, which does not extend to cover consequential loss or damage or installation costs arising from a defective product. This guarantee does not in any way affect the statutory rights of the purchaser and is offered so that you may have the benefit of our technical facilities. In many cases products don't need replacing, so for further information and help with troubleshooting, see our FAQ page at www.varilight.co.uk/faqs, or contact our Customer Services by calling +44 (01293) 223333 or create a support ticket at www.varilight.co.uk/help.

DOYLE & TRATT PRODUCTS LTD. Guarantee No. MATRIX004

Product Description	Max Total Plate Wattage LED	Max Total Plate Wattage Halogen
1-Gang Dimmer Kit (Single Plate)	400	1000
1-Gang Dimmer Kit (Twin Plate)	600	1200
2-Gang Dimmer Kit (Single Plate)	400	1000
2-Gang Dimmer Kit (Twin Plate)	600	1200
3-Gang Dimmer Kit (Twin Plate)	600	1200
4-Gang Dimmer Kit (Twin Plate)	600	1200

